
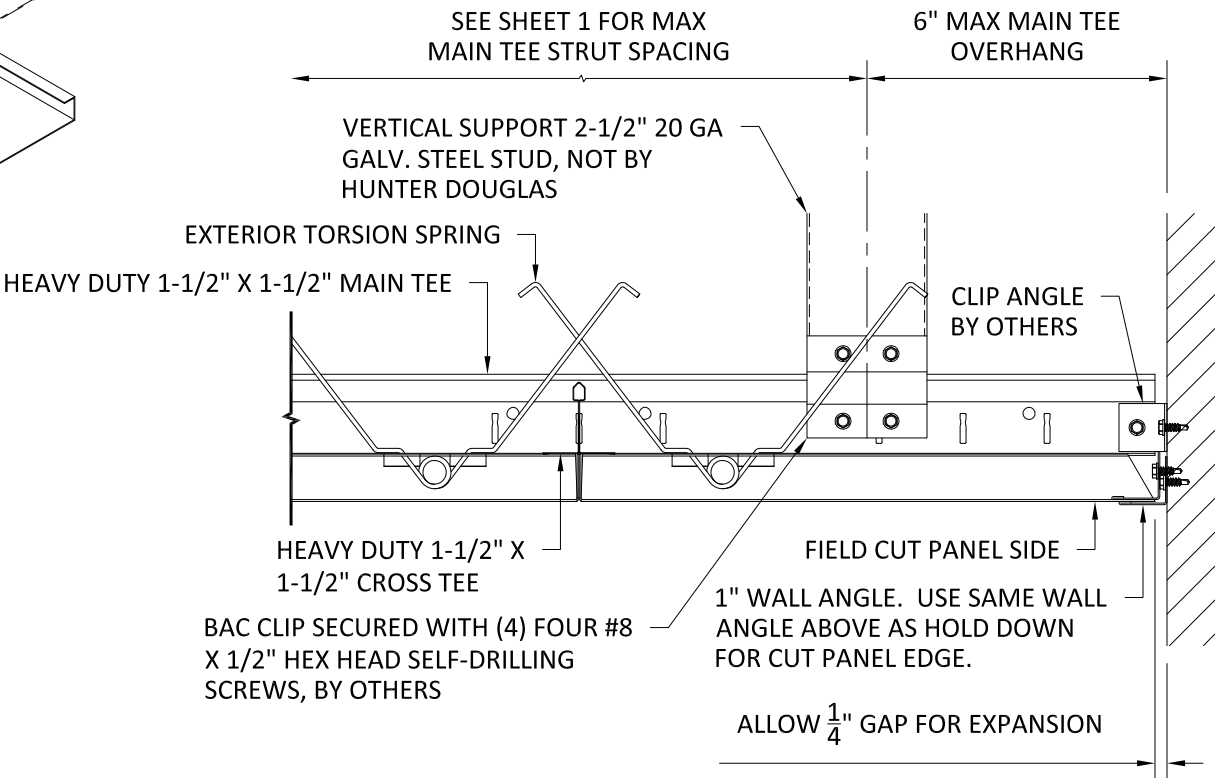
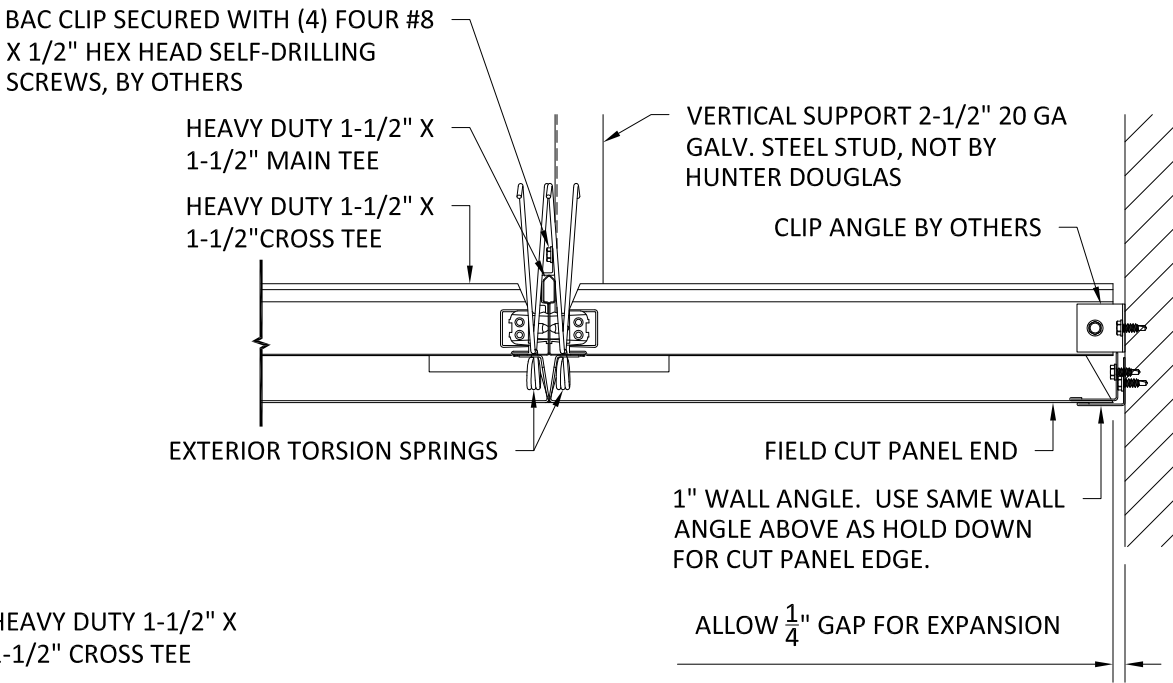


PANEL INSTALLATION:

- 1 COMPRESS EXTERIOR TORSION SPRINGS.
- 2 LIFT PANEL AND PUSH TORSION SPRINGS THROUGH PUNCHED MAIN TEE HOLES.
- 3 RELEASE SPRINGS TO HOLD PANEL IN PLACE.

PANEL REMOVAL:

- 4 REMOVE ACCESS PANEL (SEE DETAIL TS-EXT-1.3) TO ACCESS PLENUM.
- 5 COMPRESS EXTERIOR TORSION SPRINGS FROM ABOVE TO LOWER PANEL.
- 6 DISENGAGE TORSION SPRINGS ON ONE SIDE OF PANEL. PANEL WILL HINGE DOWN AND HANG IN PLACE OR MAY BE COMPLETELY REMOVED.

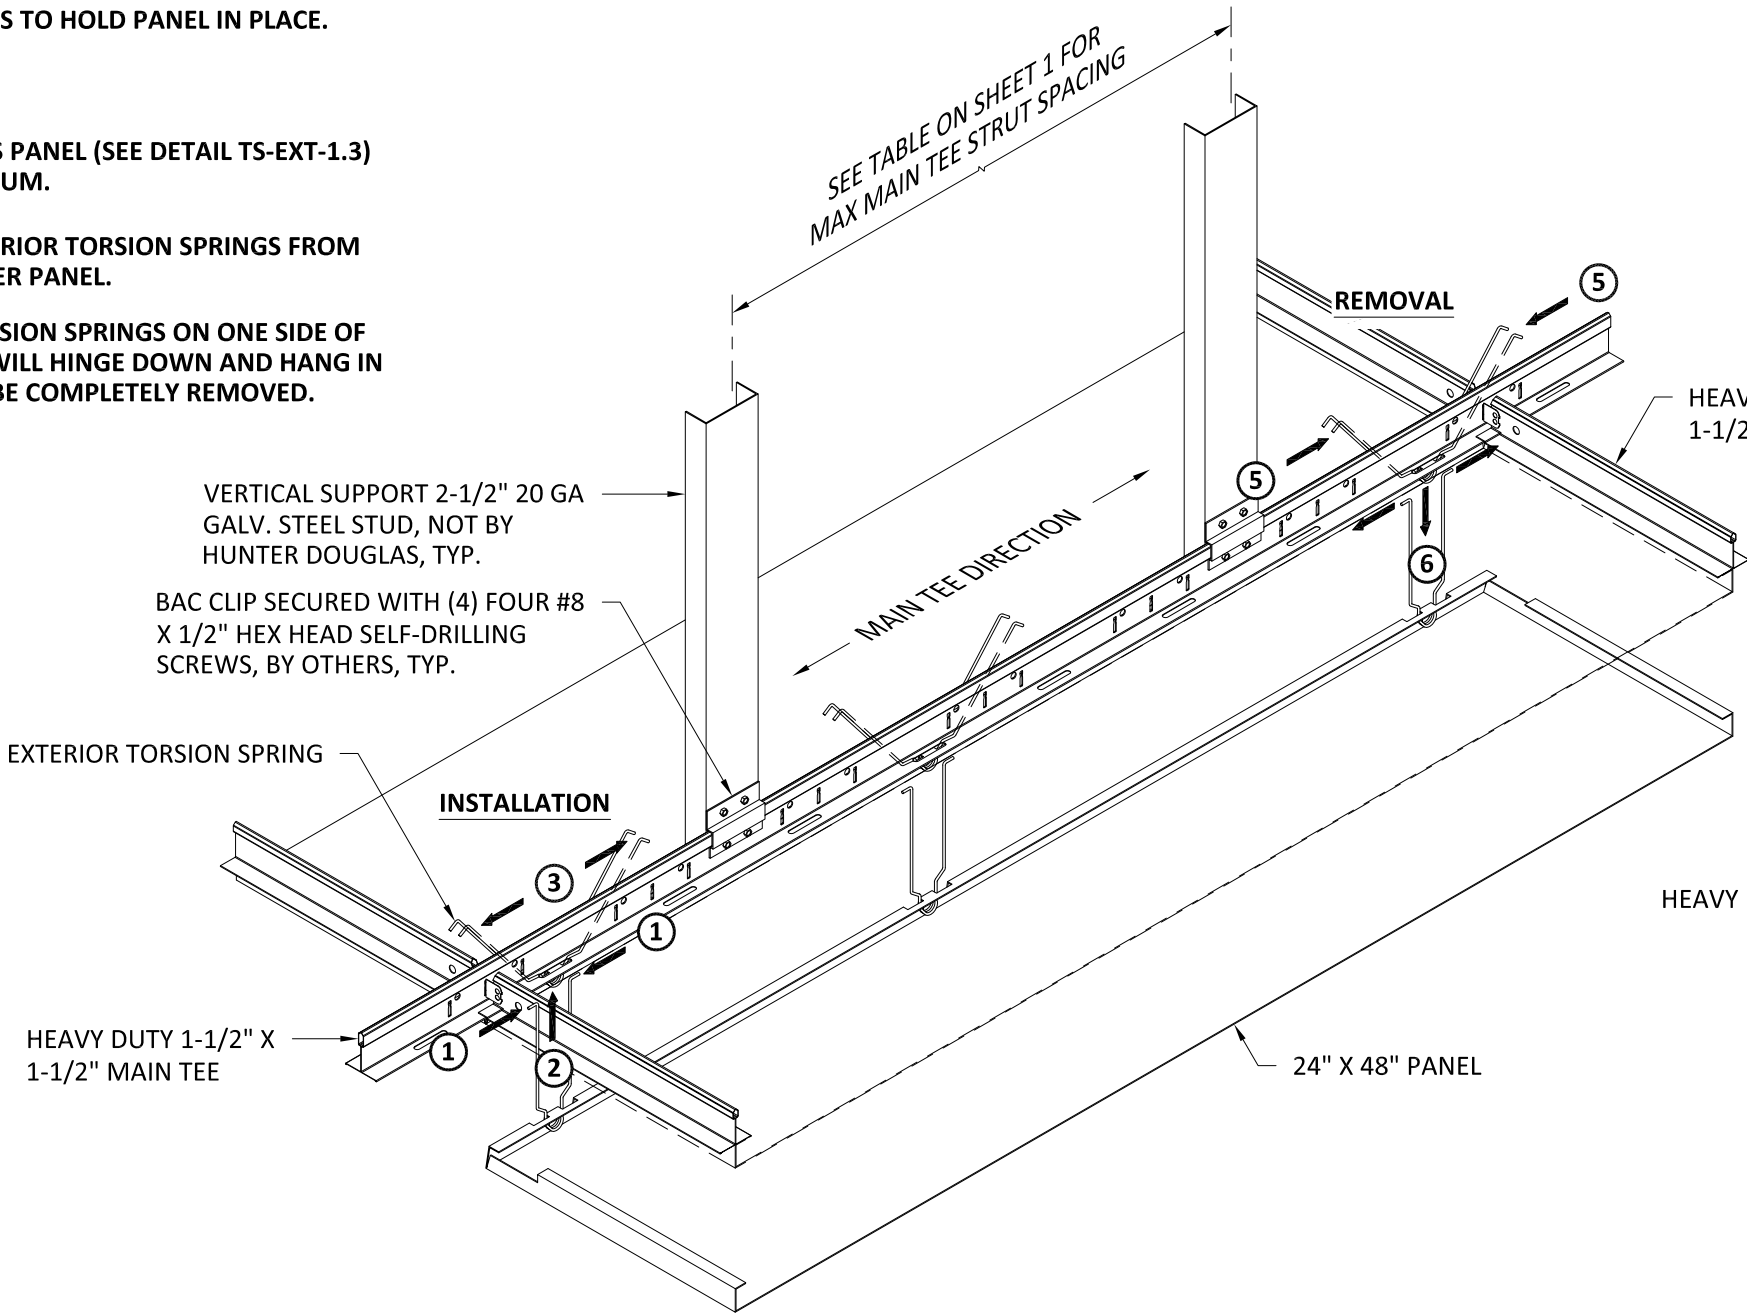

24" X 48" PANEL INSTALLATION
SCALE: NOT TO SCALE

TYPICAL WALL TERMINATIONS
SCALE: 3" = 1'-0"

HunterDouglasContract

CEILINGS

5015 Oakbrook Parkway, Suite 100
Norcross, GA 30093
800-366-4327 / 770-806-9557
fax: 770-806-0214


All rights reserved. This drawing is the property of Hunter Douglas and may not be copied or multiplied neither wholly nor partly. It may not be submitted for perusal to third parties either.

www.hunterdouglascontract.com

SPECIFICATIONS
(unless noted otherwise)
MATERIAL: .040" ALUMINUM



TOLERANCES
(unless noted otherwise)
DECIMAL: .0 +/- .060
.00 +/- .030
.000 +/- .010
FRACTIONAL: +/- 1/32"
ANGULAR: +/- 1/2° (.5°)

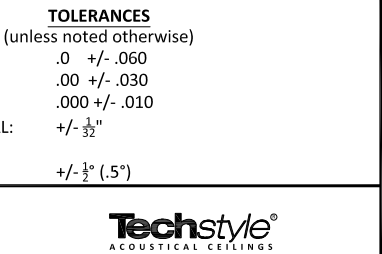

24" X 48" PANEL INSTALLATION DETAILS

PROJECT: EXTERIOR TORSION SPRING
DRAWING NUMBER: TS-EXT-3.2 (SHEET 2 OF 3)
PART NUMBER:
SCALE: AS SHOWN
DATE: 5/9/14
DRAWN BY: HDAP ENGINEERING