



SECTION 'A' - 'A'

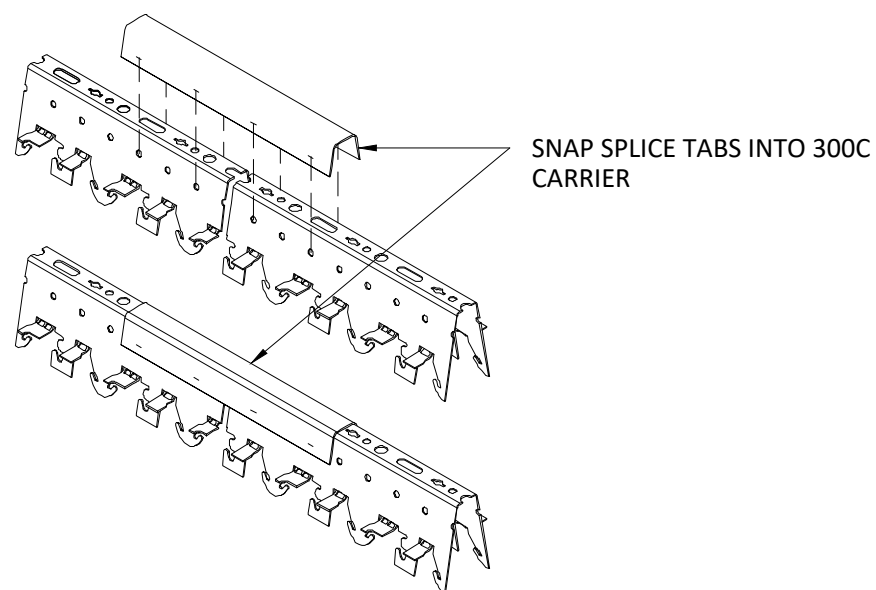

IF THE DESIRED CARRIER LENGTH EXCEEDS THE MAXIMUM OF 16'-0", USE A LUXALON CARRIER SPLICE, TO CONNECT TWO FACTORY CARRIER ENDS.

THE TABS OF THE SPLICE SNAP INTO THE HOLES IN THE CARRIER AND ADDITIONAL FIXING IS NOT NECESSARY. THE MODULE IS CONTINUED AUTOMATICALLY.

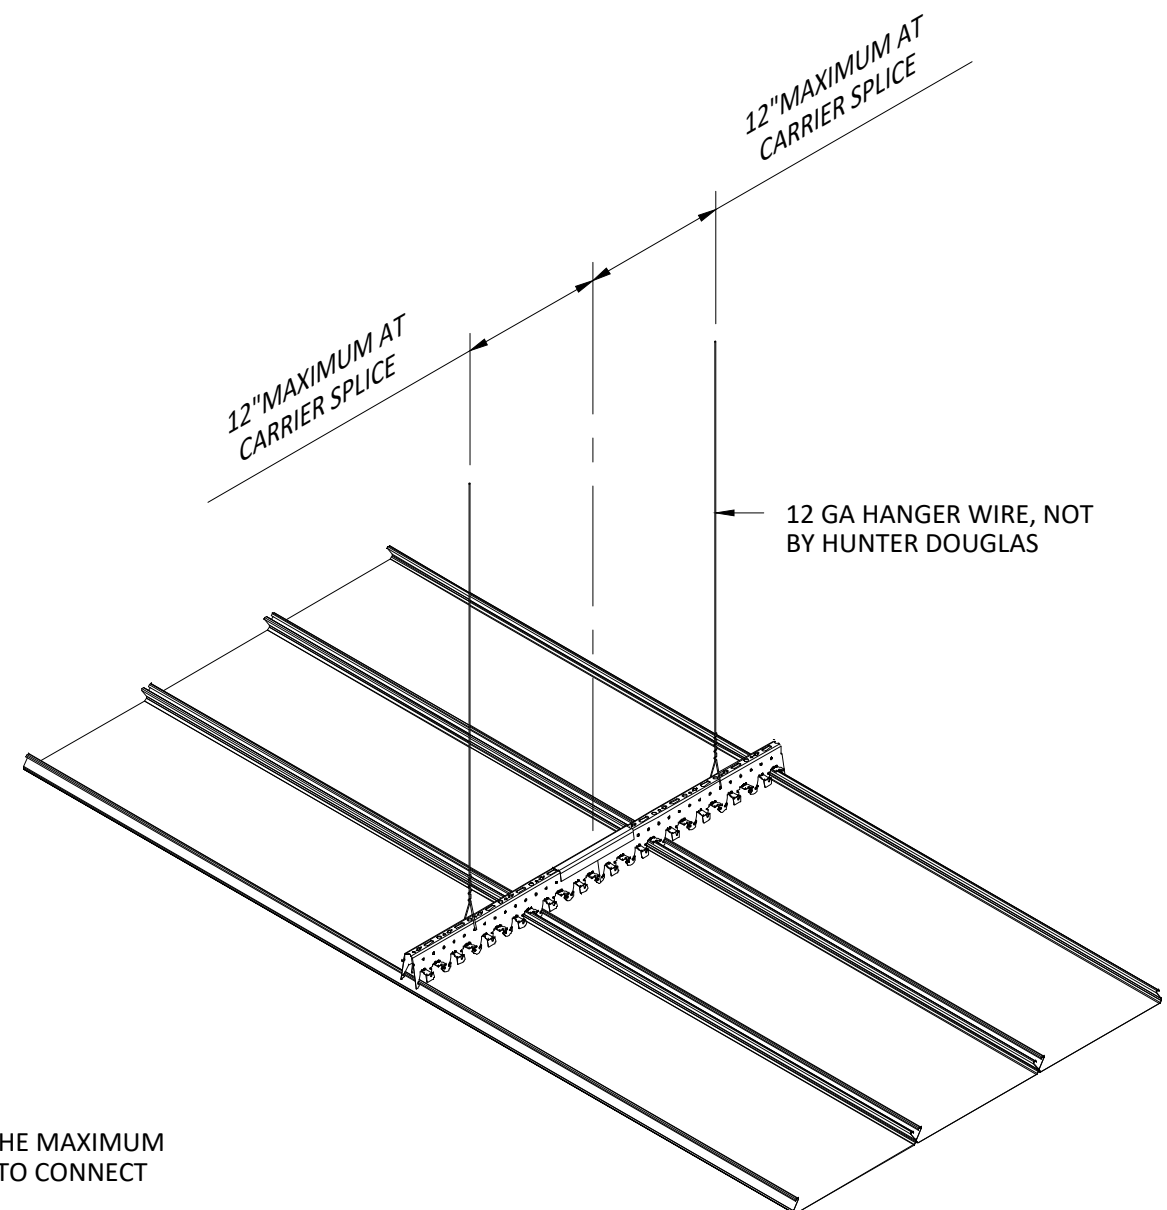

## INTERIOR INSTALLATION

**HunterDouglas**  
Architectural

5015 Oakbrook Parkway, Suite 100  
Norcross, GA 30093  
T 800.366.4327  
F 770.806.0214  
HDarchitectural.com

*All rights reserved. This drawing is the property of Hunter Douglas. It may not be copied or multiplied, neither wholly nor partly. It may not be submitted for perusal to third parties.*

### SPECIFICATIONS

(unless noted otherwise)

MATERIAL: .028" ALUMINUM 300C PANEL | .040" ALUMINUM 300C CARRIER  
FINISH: PAINT | POWDER COAT | DECORATED WOOD FINISH | WOOD VENEER |  
LUXACOTE  
PERFORATION: NON-PERFORATED | #160

### CARRIER SPLICE

PROJECT: 300C PRODUCT SPECIFICATIONS  
DRAWING NUMBER: 300C-A1.3  
SCALE: 3" = 1'-0"  
DRAWN BY: HDA ENGINEERING  
DATE: 8/15/16