
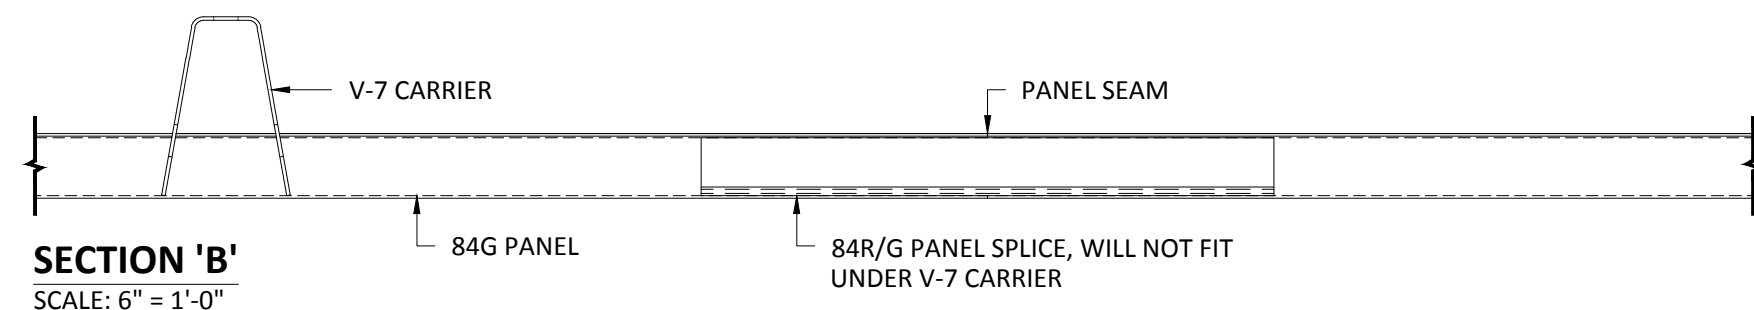


**NOTE 1:**  
DO NOT SPLICE PANELS DIRECTLY BELOW V-7 CARRIERS.  
PANEL SPLICES DO NOT FIT UNDER CARRIERS.

**NOTE 2:**  
FIELD CUT PANELS AS REQUIRED TO CREATE A RANDOM  
STAGGERED SEAM PATTERN. AVOID ALIGNED SEAMS.

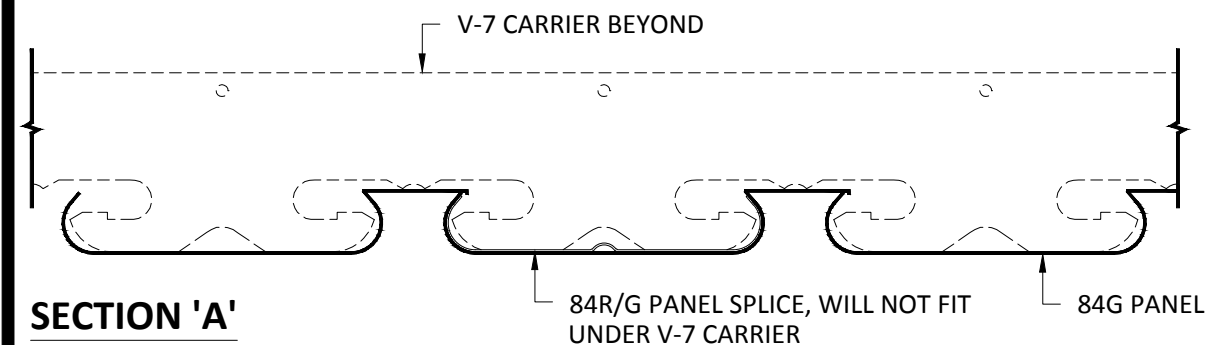

## INTERIOR INSTALLATION

\*HANGER WIRE OMITTED FOR CLARITY

# HunterDouglasContract

## CEILINGS

5015 Oakbrook Parkway, Suite 100  
Norcross, GA 30093  
800-366-4327 / 770-806-9557  
fax: 770-806-0214

*All rights reserved. This drawing is the property of Hunter Douglas and may not be copied or multiplied neither wholly nor partly. It may not be submitted for perusal to third parties either.*

[www.hunterdouglascontract.com](http://www.hunterdouglascontract.com)

### SPECIFICATIONS

(unless noted otherwise)

MATERIAL: 0.020" OR 0.025" ALUMINUM 84G PANEL  
0.040" ALUMINUM V-7 CARRIER

FINISH: PAINT / POWDER COAT / DECORATED WOOD FINISH

PERFORATION: #124 (15% OPEN) / #140 (23% OPEN) / NON-PERFORATED

**LUXALON**  
METAL CEILINGS

**WoodWright**  
WOOD CEILINGS

**Techstyle**  
ACOUSTICAL CEILINGS

### TOLERANCES

(unless noted otherwise)

DECIMAL: .0 +/- .060  
.00 +/- .030  
.000 +/- .010

FRACTIONAL: +/-  $\frac{1}{32}$ "

ANGULAR: +/-  $\frac{1}{2}^{\circ}$  (.5°)

## PANEL SPLICE SPECIFICATIONS

PROJECT: 84G PRODUCT SPECIFICATIONS  
DRAWING NUMBER: 84G-A1.3  
PART NUMBER: N/A  
SCALE: AS SHOWN  
DATE: 2/26/15  
DRAWN BY: HDAP ENGINEERING