





CORNER BRACKET INSTALLATION

- ① FEED TOP CORNER BRACKET ASSEMBLY INTO FACTORY-MITERED BEAM AND ALIGN POP RIVET HOLES
- ② SECURE TOP CORNER BRACKET ASSEMBLY WITH FOUR (4) 1/8" POP RIVETS
- ③ USE DOUBLE-SIDED ADHESIVE TO SECURE BOTTOM CORNER BRACKET INTO BEAM
- ④ FEED SECOND BEAM INTO BRACKETS AND SECURE WITH FOUR (4) 1/8" POP RIVETS
- ⑤ LIFT CORNER ASSEMBLY INTO POSITION AND ON MAIN TEE AND SQUEEZE SCISSOR CLIP ONTO MAIN TEE WEB.

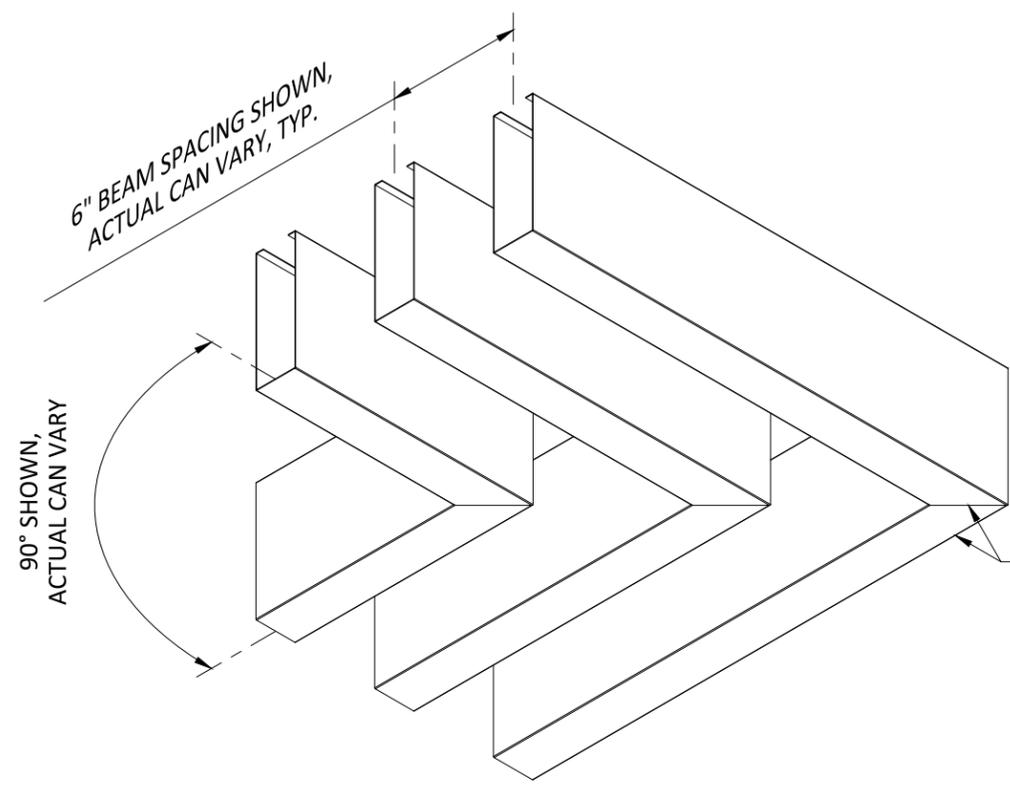

VIEW FROM BELOW
SCALE: NOT TO SCALE

FACTORY-MITERED
2" X 6" TAVOLA
BEAMS**

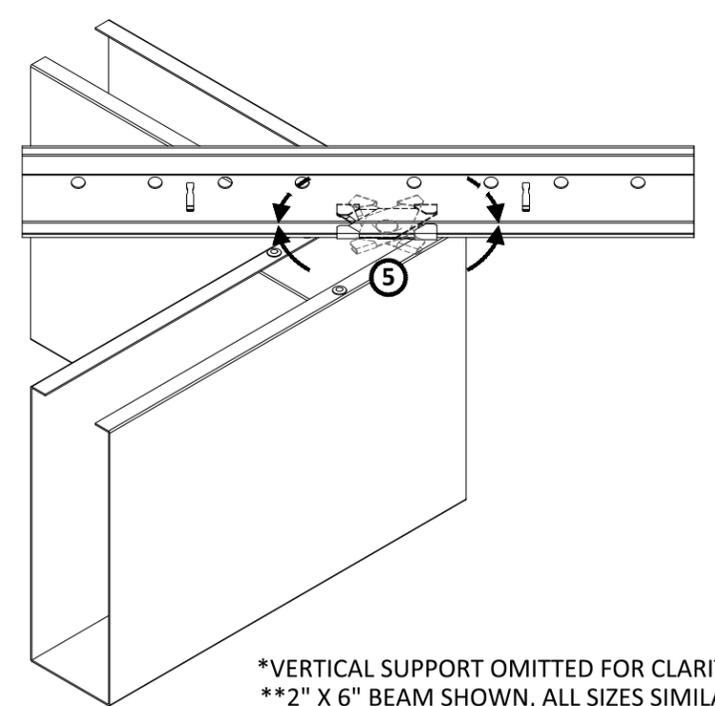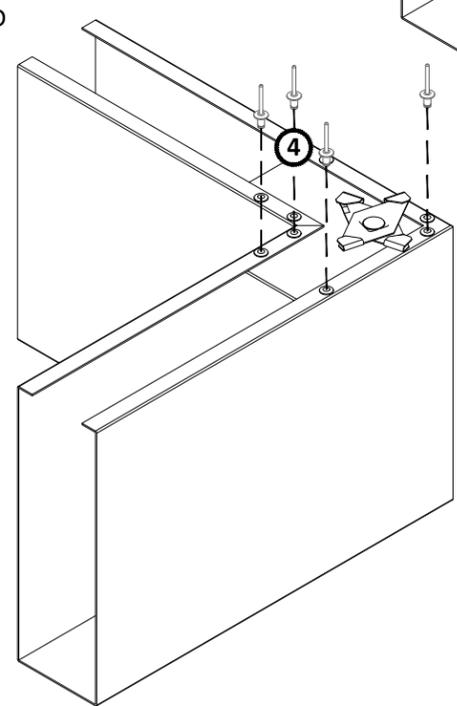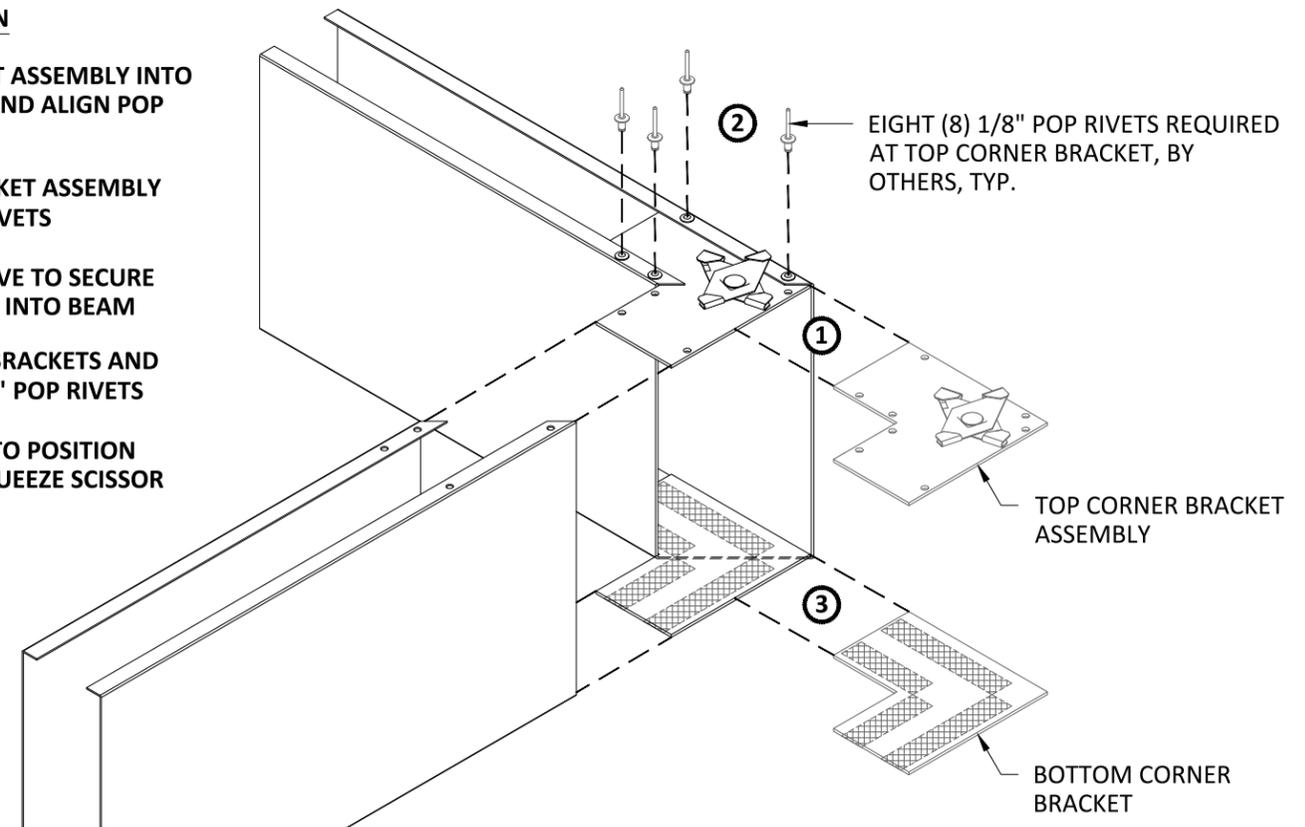

*VERTICAL SUPPORT OMITTED FOR CLARITY
**2" X 6" BEAM SHOWN, ALL SIZES SIMILAR



5015 Oakbrook Parkway, Suite 100
Norcross, GA 30093
T 800.366.4327
F 770.806.0214
HDarchitectural.com

All rights reserved. This drawing is the property of Hunter Douglas. It may not be copied or multiplied, neither wholly nor partly. It may not be submitted for perusal to third parties.

SPECIFICATIONS

(unless noted otherwise)

MATERIAL: .025" | .032" | .040" ALUMINUM
FINISH: PAINT | POWDER COAT | DECORATED WOOD FINISH | WOOD VENEER
PERFORATION: NON-PERFORATED | #106 | #119

CORNER CONDITIONS

PROJECT: TAVOLA PRIME PRODUCT SPECIFICATIONS
DRAWING NUMBER: TAVOLA-PRIME-A1.10
SCALE: AS SHOWN
DRAWN BY: HDA ENGINEERING
DATE: 8/25/17