


IF THE DESIRED CARRIER LENGTH EXCEEDS THE MAXIMUM OF 16'-0" [4.880M], USE A LUXALON CARRIER SPLICE, TO CONNECT TWO FACTORY CARRIER ENDS.

THE TABS OF THE SPLICE SNAP INTO THE HOLES IN THE CARRIER AND SECURE WITH TEK SCREWS ON 1 CARRIER END ONLY. THE MODULE IS CONTINUED AUTOMATICALLY.

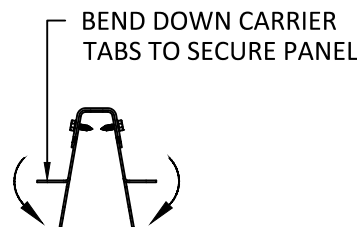


SECTION 'B' - 'B'
SCALE: 3" = 1'-0"

VERTICAL SUPPORT DIETRICH STE-20 2-1/2" 20 GA GALV. STEEL STUD OR EQUAL, MAX LENGTH 85", SEE NOTE A ON DRAWING # 300C-B1.2 FOR VERTICAL SUPPORT REQUIREMENTS

SEE TABLE 1 ON DRAWING # 300C-B1.2 FOR MAX O.C. SPACING REQUIREMENTS, TYP.

12 GA HANGER WIRE, WITHIN 3" OF VERTICAL SUPPORT, TYP., NOT BY HUNTER DOUGLAS

6" MAX AT CARRIER SPLICE, TYP.

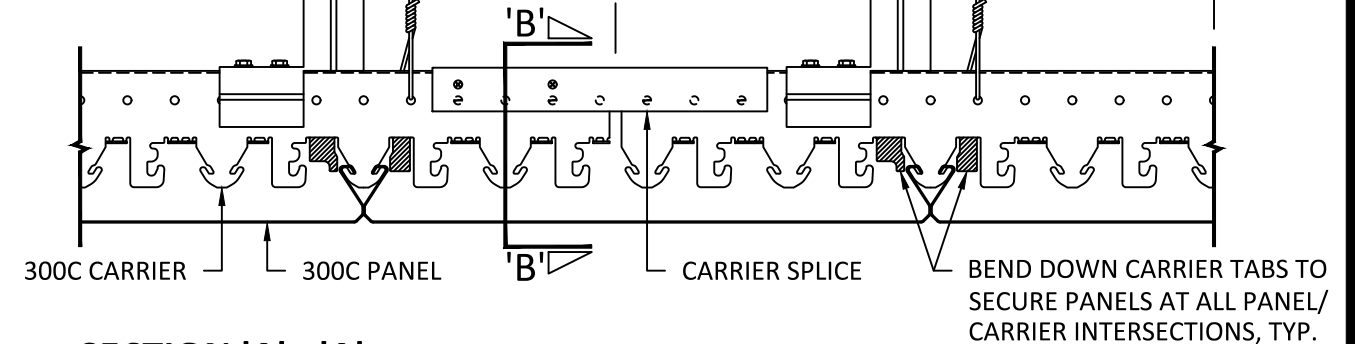

SECTION 'A' - 'A'
SCALE: 3" = 1'-0"

SNAP SPLICE TABS INTO 300C CARRIER, SECURE WITH (2) TEK SCREWS PER SPLICE SIDE, (4) SCREWS TOTAL, REQUIRED

SECURE ONE CARRIER END ONLY

EXTERIOR INSTALLATION

HunterDouglasContract

CEILINGS

5015 Oakbrook Parkway, Suite 100
Norcross, GA 30093
800-366-4327 / 770-806-9557
fax: 770-806-0214

All rights reserved. This drawing is the property of Hunter Douglas and may not be copied or multiplied neither wholly nor partly. It may not be submitted for perusal to third parties either.

www.hunterdouglascontract.com

SPECIFICATIONS

(unless noted otherwise)

MATERIAL: 0.028" ALUMINUM 300C PANEL
0.040" ALUMINUM 300C CARRIER
FINISHES: PAINT / POWDER COAT / DECORATED WOOD FINISH / LUXACOTE
PERFORATION: #124 (15% OPEN) / NON-PERFORATED

LUXALON
METAL CEILINGS

WoodWright
WOOD CEILINGS

TOLERANCES

(unless noted otherwise)

DECIMAL: .0 +/- .060
.00 +/- .030
.000 +/- .010
FRACTIONAL: +/- 1/32"
ANGULAR: +/- 1/2° (.5°)

Techstyle
ACOUSTICAL CEILINGS

CARRIER SPLICE

PROJECT: 300C PRODUCT SPECIFICATIONS
DRAWING NUMBER: 300C-B1.4
PART NUMBER: N/A
SCALE: 3" = 1'-0"
DATE: 10/28/16
DRAWN BY: HDAP ENGINEERING