
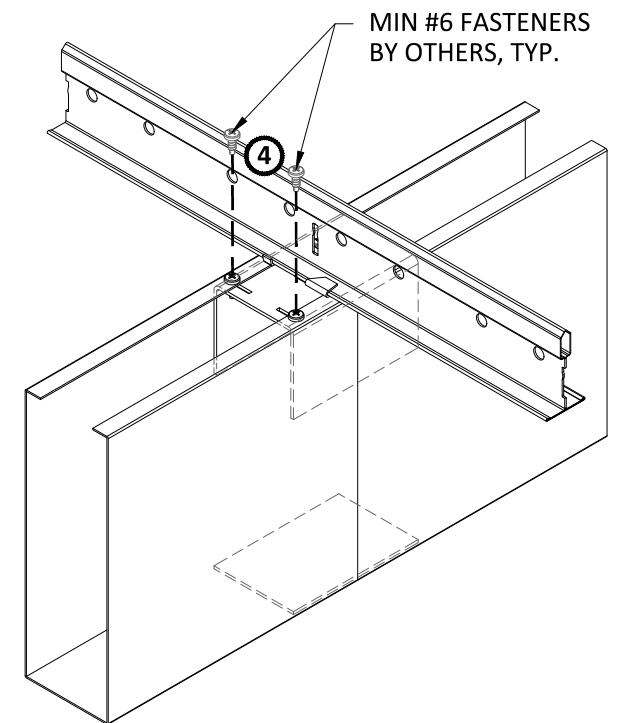


- 1 INSERT HANGER BRACKET ASSEMBLY ONTO MAIN TEE AND ROTATE TO ENGAGE TWIST CLIP.
- 2 ADJUST HANGER BRACKET ASSEMBLY TO FINAL POSITION AND FEED FIRST TAVOLA BEAM HALFWAY ONTO HANGER BRACKET. SECURE WITH TWO (2) MIN #6 FASTENERS.
- 3 REMOVE LINER FROM DOUBLE-SIDED ADHESIVE ON BOTTOM SPLICE PLATE AND SECURE HALFWAY INTO FIRST TAVOLA BEAM.
- 4 FEED SECOND TAVOLA BEAM ONTO HANGER BRACKET ASSEMBLY AND BOTTOM PLATE AND SECURE WITH TWO (2) MIN #6 FASTENERS.

**NON-SPLICE LOCATIONS:** ONLY TWO (2) FASTENERS (1 PER SIDE) ARE REQUIRED AND BOTTOM PLATE IS OMITTED.


## HANGER BRACKET INSTALLATION

SCALE: NOT TO SCALE

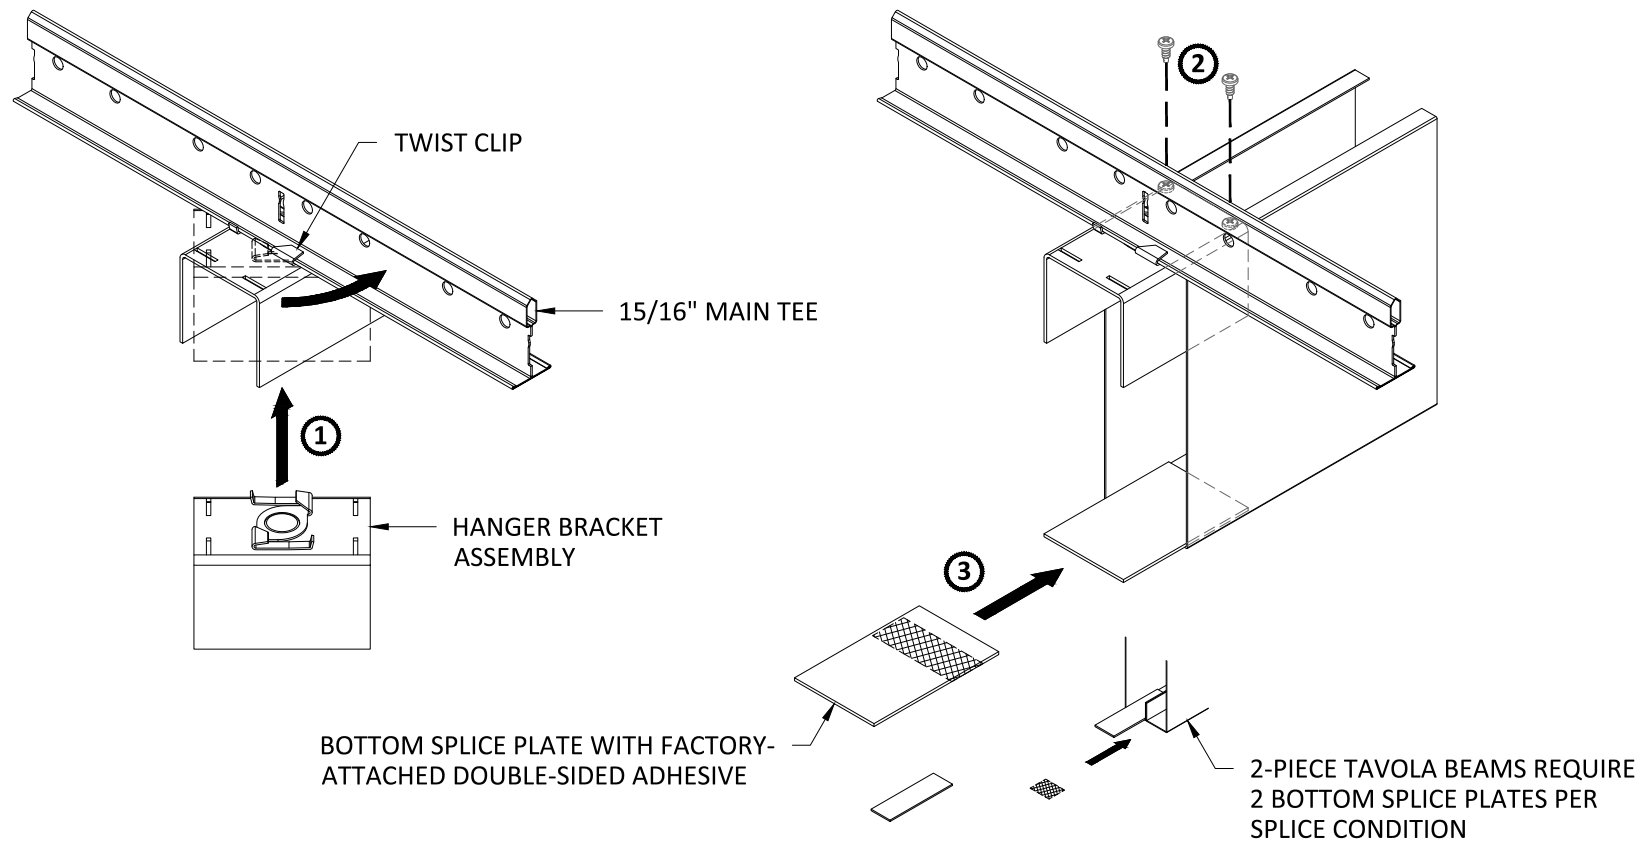

## INTEGRAL METAL END CAP - PAINTED & POWDER COATED

END CAP IS FACTORY-FORMED AND FACTORY-POP-RIVETED

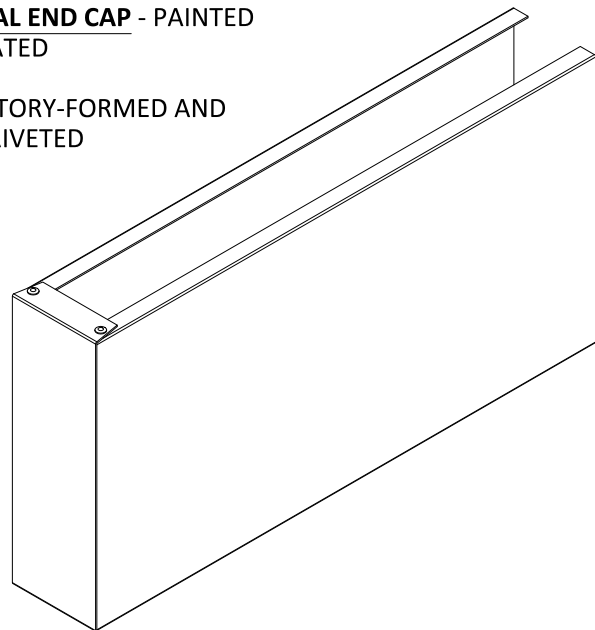


## END CAP INSTALLATION

SCALE: NOT TO SCALE


## METAL END CAP - PAINTED, POWDER COATED, & DECORATED FINISHES

- 1 INSERT END CAP ONTO BEAM END AND ENSURE CAP INSERT GOES INSIDE OF BEAM
- 2 SECURE END CAP WITH TWO (2) MIN #6 FASTENERS

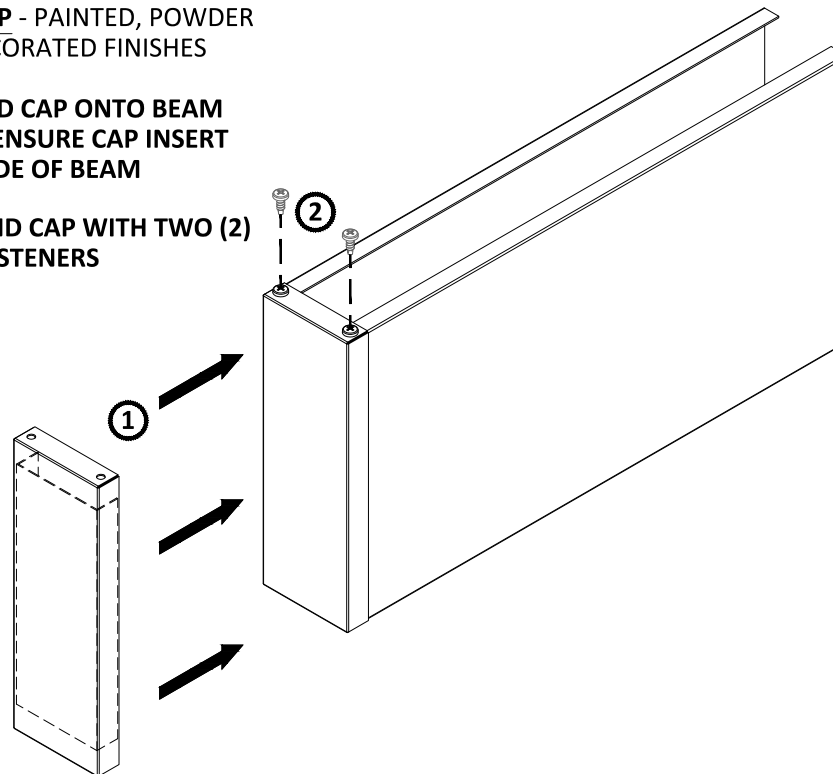

## WOOD END CAP - VENEER FINISH

- 1 APPLY CONSTRUCTION ADHESIVE TO BOTTOM OF END CAP AS NEEDED
- 2 INSERT END CAP INTO BEAM END AND ENSURE CAP INSERT GOES INSIDE OF BEAM
- 3 SECURE END CAP WITH TWO (2) MIN #6 FASTENERS

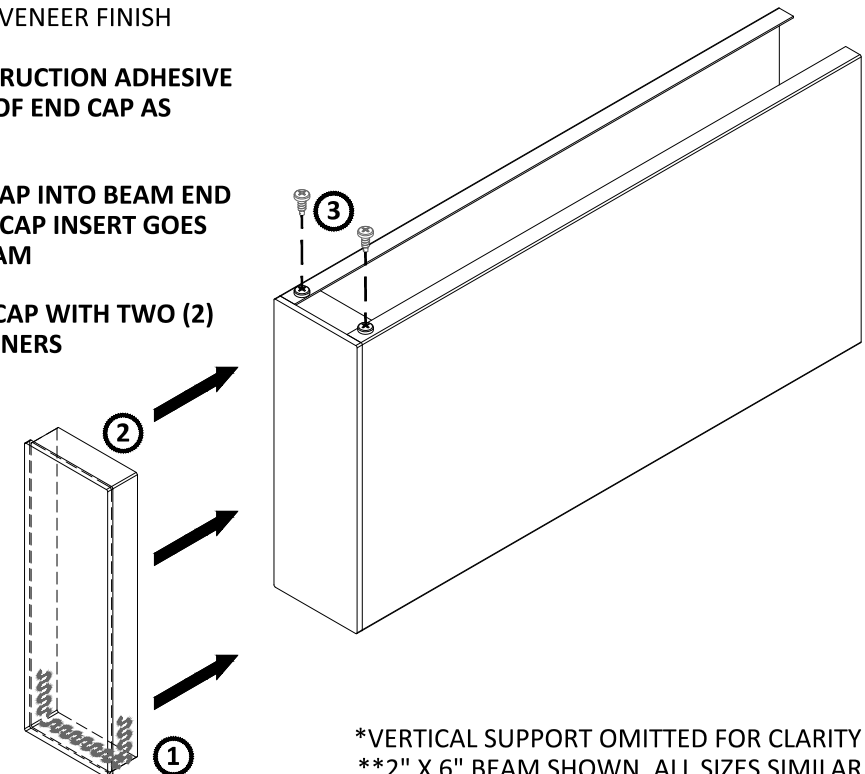

\*VERTICAL SUPPORT OMITTED FOR CLARITY  
\*\*2" X 6" BEAM SHOWN, ALL SIZES SIMILAR

## SPECIFICATIONS

(unless noted otherwise)

MATERIAL: .025" | .032" | .040" ALUMINUM

FINISH: PAINT | POWDER COAT | DECORATED WOOD FINISH | WOOD VENEER

PERFORATION: NON-PERFORATED | #103 | #106 | #111 | #119 | #150

## HANGER BRACKET & END CAP INSTALLATION

PROJECT: DIVERGENT TAVOLA BEAM PRODUCT SPECIFICATIONS

DRAWING NUMBER: TAVODIV-A1.3

SCALE: AS SHOWN

DRAWN BY: HDA ENGINEERING

DATE: 8/15/16