
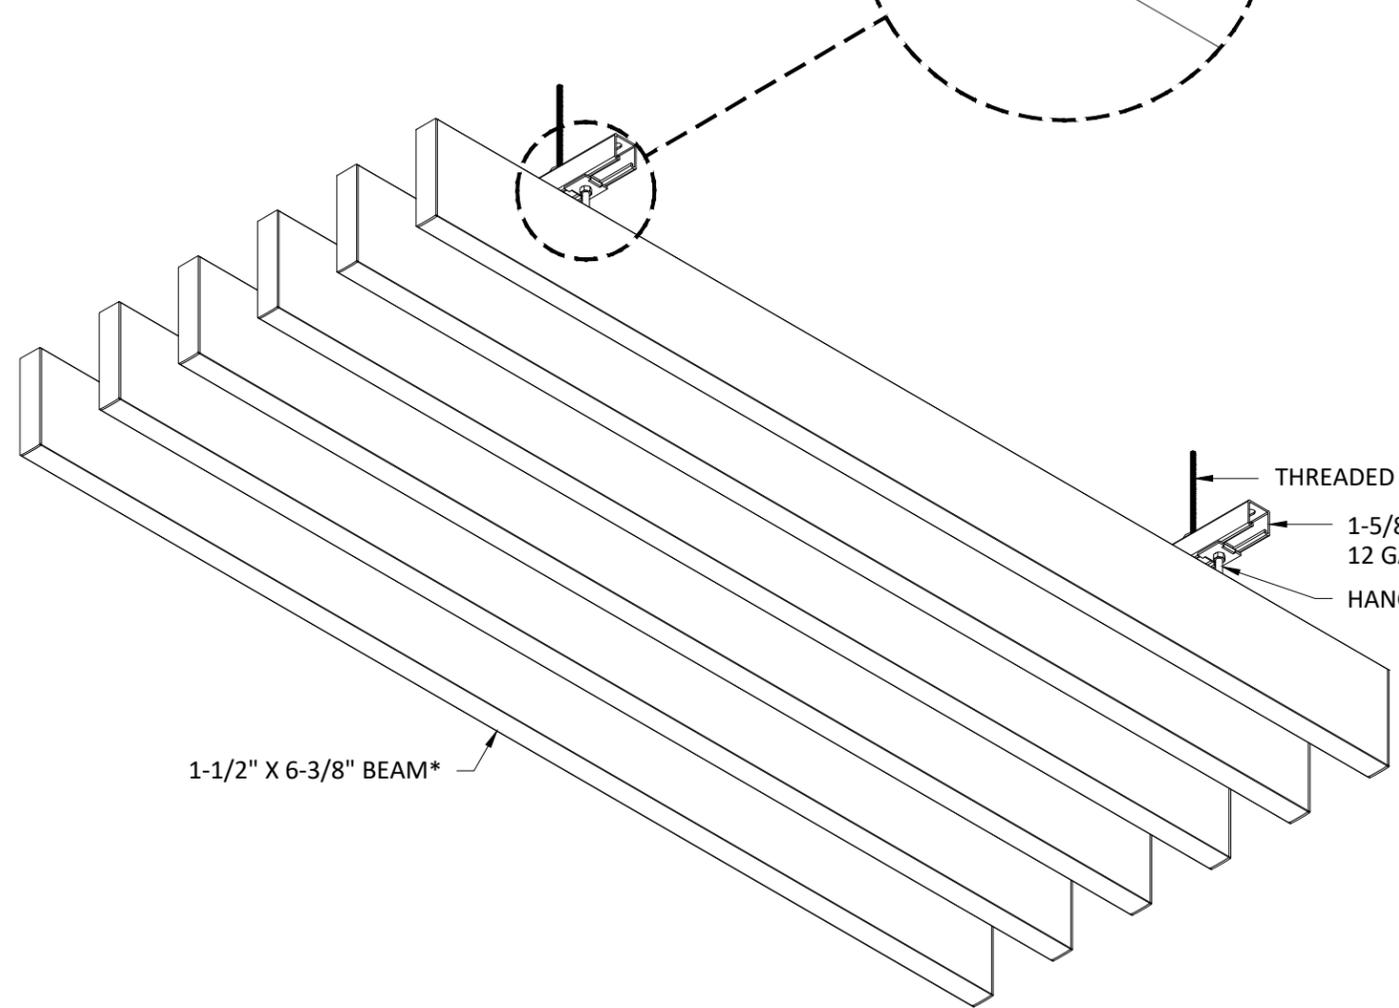



- ① LOOSEN HEX NUT AT ALL HANGER BRACKETS OF BAFFLES\* REQUIRED FOR PLENUM ACCESS.
- ② SLIDE BAFFLES EVENLY ALONG UNISTRUT TO ACCESS PLENUM. ENSURE TOP NUT REMAINS ENGAGED WITH UNISTRUT DURING ACCESS.

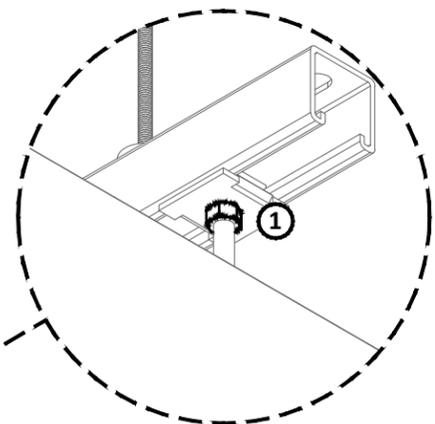


1-1/2" X 6-3/8" BEAM\*

THREADED ROD BY OTHERS, TYP.  
 1-5/8" X 1-5/8" UNISTRUT P1000 - 12 GA. STEEL PRIMARY CHANNEL  
 HANGER BRACKET

**NOTE:**  
 CREATE SMALLEST POSSIBLE OPENING FOR PLENUM ACCESS AND AVOID LARGE CONCENTRATIONS OF STACKED BAFFLES.

**NOTE:**  
 THREADED ROD ATTACHMENT TO UNISTRUT AND STRUCTURE ABOVE DESIGNED AND PROVIDED BY OTHERS. INSTALLER TO ENSURE HANGING METHOD DOES NOT INTERFERE WITH THE MOVEMENT OF HANGER BRACKET INSIDE OF UNISTRUT.

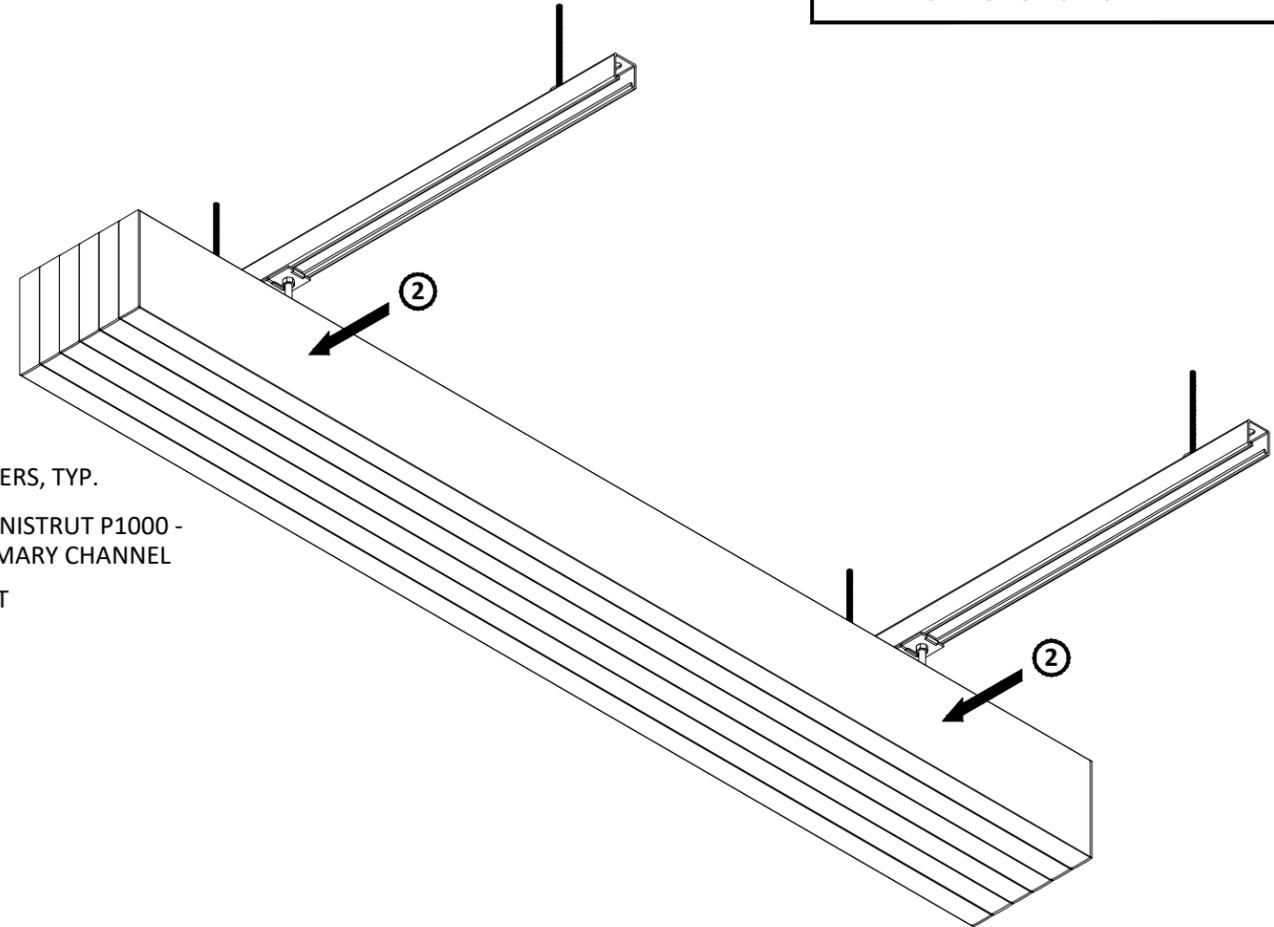

\*1-1/2" X 6-3/8" BEAM PROFILE SHOWN, ALL PROFILES SIMILAR



5015 Oakbrook Parkway, Suite 100  
 Norcross, GA 30093  
 T 800.366.4327  
 F 770.806.0214  
 HDarchitectural.com

*All rights reserved. This drawing is the property of Hunter Douglas. It may not be copied or multiplied, neither wholly nor partly. It may not be submitted for perusal to third parties.*

**SPECIFICATIONS**  
 (unless noted otherwise)

MATERIAL: EXTRUDED ALUMINUM ALLOY 6063-T5  
 FINISH: PAINT | POWDER COAT | DECORATED WOOD FINISH | WOOD VENEER | WILSONART LAMINATE  
 PERFORATION: NOT AVAILABLE

**PLENUM ACCESS**

PROJECT: HIGH PROFILE SERIES PRODUCT SPECIFICATIONS  
 DRAWING NUMBER: HPS-A1.4  
 SCALE: NTS  
 DRAWN BY: HDA ENGINEERING  
 DATE: 9/8/17