




IF THE DESIRED CARRIER LENGTH EXCEEDS THE MAXIMUM OF 16'-0", USE A UNIVERSAL CARRIER SPLICE TO CONNECT THE FACTORY CARRIER ENDS.

THE TABS OF THE SPLICE SNAP INTO THE HOLES IN THE CARRIER AND ADDITIONAL FIXING IS NOT NECESSARY. THE MODULE IS CONTINUED AUTOMATICALLY.



**SECTION 'B'**  
SCALE: FULL (1:1)

VERTICAL SUPPORT 1/2" X 1-1/2"  
16 GA GALV. CRC OR EQUAL,  
MAX LENGTH 28", SEE NOTE A  
ON DRAWING # EXTDBOX2-B1.3 FOR  
VERTICAL SUPPORT REQUIREMENTS

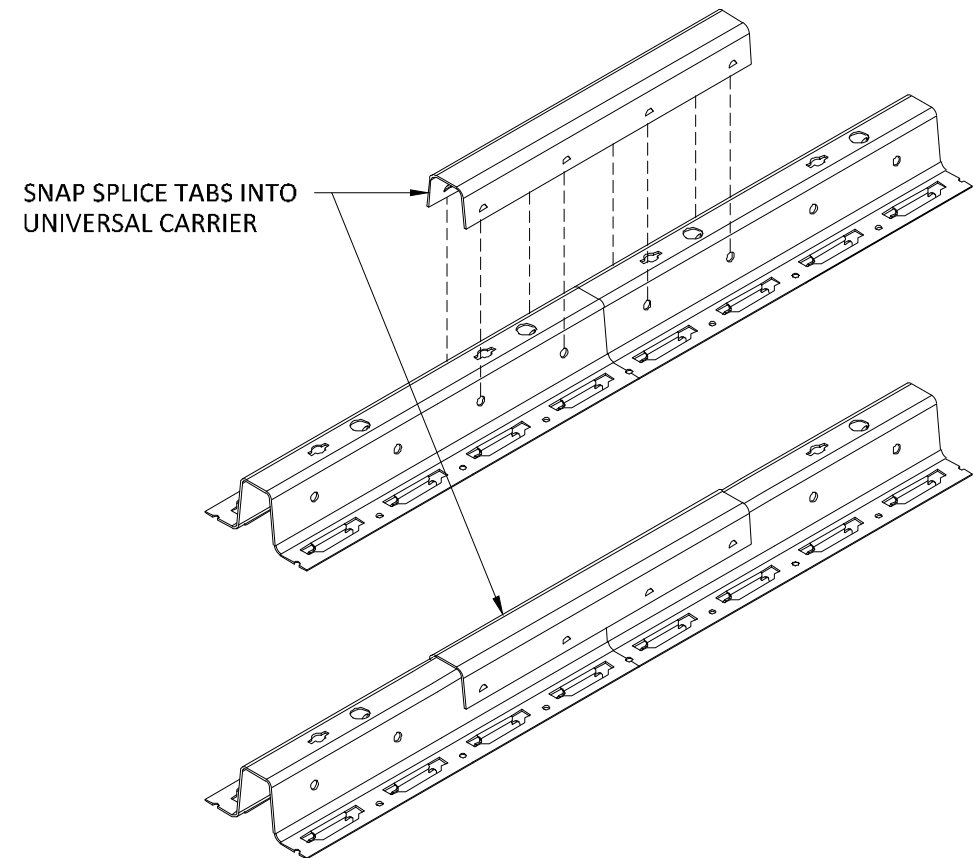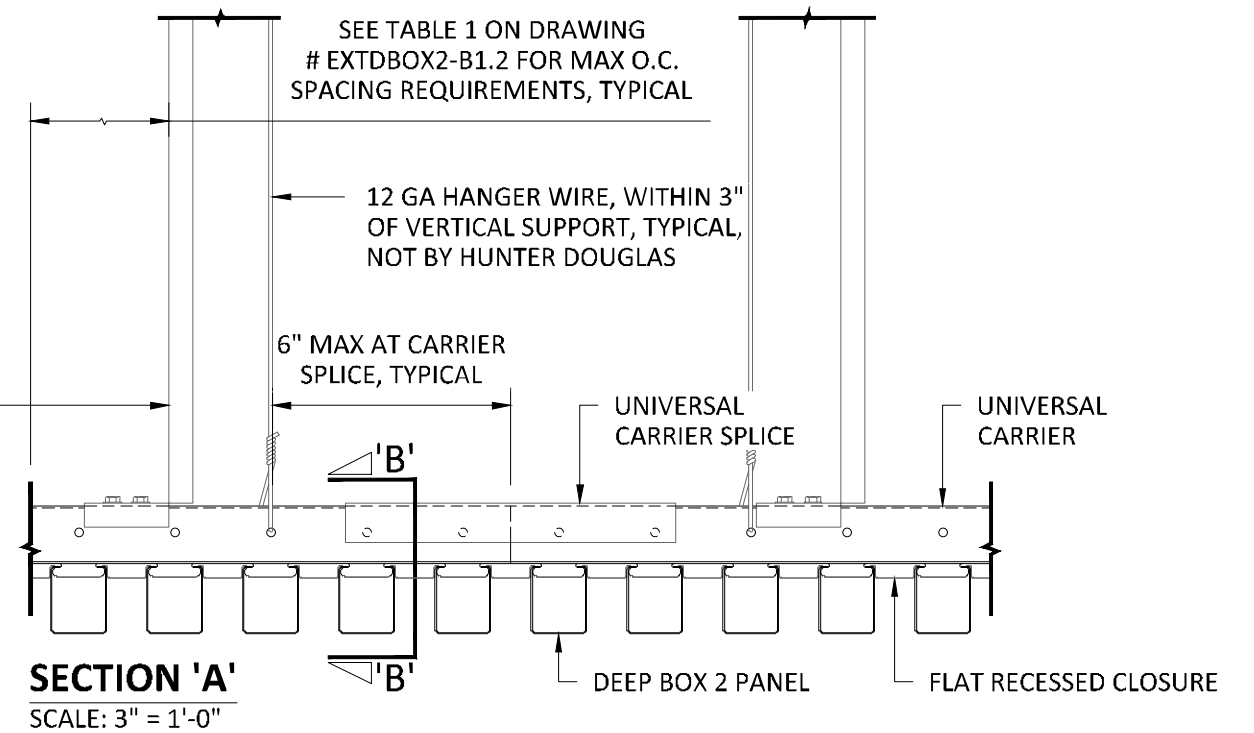

## EXTERIOR INSTALLATION



5015 Oakbrook Parkway, Suite 100  
Norcross, GA 30093  
T 800.366.4327  
F 770.806.0214  
HDarchitectural.com

*All rights reserved. This drawing is the property of Hunter Douglas. It may not be copied or multiplied, neither wholly nor partly. It may not be submitted for perusal to third parties.*

## SPECIFICATIONS

(unless noted otherwise)

MATERIAL: .020" | .025" ALUMINUM DEEP BOX 2 PANEL | .040" ALUMINUM  
UNIVERSAL CARRIER  
FINISH: PAINT | POWDER COAT | DECORATED WOOD FINISH | LUXACOTE  
PERFORATION: NOT AVAILABLE

## UNIVERSAL CARRIER SPLICE

PROJECT: LINEAR EXTERIOR DEEP BOX 2 PRODUCT SPECIFICATIONS  
DRAWING NUMBER: DEEP BOX2-B1.6  
SCALE: AS SHOWN  
DRAWN BY: HDA ENGINEERING  
DATE: 12/5/16