

NOTE:
DUE TO BAFFLE SPLICE FASTENERS,
HANGER BRACKETS WILL NOT FIT AT
SPLICE LOCATIONS.


1-5/8" X 1-5/8" UNISTRUT P1000 -
12 GA. STEEL PRIMARY CHANNEL

1-1/2" X 6-3/8" BEAM*

BAFFLE SPLICE
LOCATION

MIN TWO (2) HANGER BRACKETS
REQUIRED PER BAFFLE, TYP.

- ① INSERT BAFFLE SPLICE HALFWAY INTO BAFFLE.
- ② SECURE WITH TWO (2) MIN #8 TEK SCREWS (BY OTHERS).
- ③ SLIDE SECOND BAFFLE OVER SPLICE AND TIGHT AGAINST FIRST BAFFLE. ENSURE FINISHED SEAM IS ALIGNED AND FLUSH ON ALL SIDES.
- ④ SECURE REMAINING SIDE WITH TWO (2) MIN #8 TEK SCREWS.

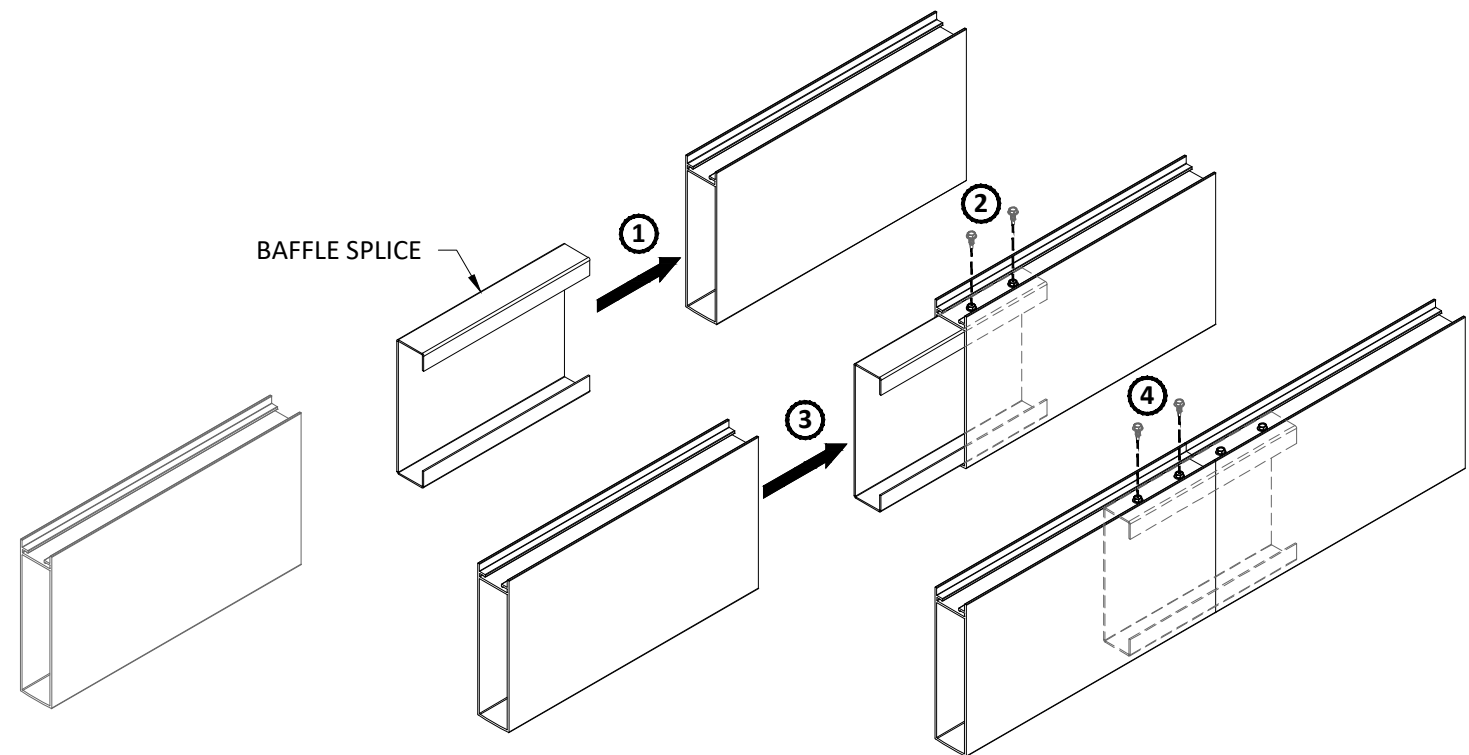

*1-1/2" X 6-3/8" BEAM PROFILE SHOWN, ALL PROFILES SIMILAR
**VERTICAL SUPPORT OMITTED FOR CLARITY

SPECIFICATIONS
(unless noted otherwise)

MATERIAL: EXTRUDED ALUMINUM ALLOY 6063-T5
FINISH: PAINT | POWDER COAT | DECORATED WOOD FINISH | WOOD VENEER |
WILSONART LAMINATE
PERFORATION: NOT AVAILABLE

BAFFLE SPLICE INSTALLATION

PROJECT: HIGH PROFILE SERIES PRODUCT SPECIFICATIONS
DRAWING NUMBER: HPS-A1.5
SCALE: NTS
DRAWN BY: HDA ENGINEERING
DATE: 9/8/17